

Linear Diaphragm Pumps LW-240, LW-300, LW-400



Flow at rated pressure

425 I/min at 200 mbar

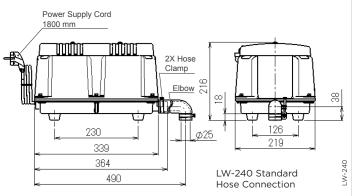



PNEUMATIC DATA			
Description	LW-240	LW-300	LW-400
Part number	52500410	52500411	52500414
Flow at rated pressure	240 l/min	350 l/min	425 l/min
Rated pressure	200 mbar	200 mbar	200 mbar
Operating range	100 to 250 mbar	100 to 250 mbar	100 to 250 mbar

ELECTRICAL DATA			
Motor type	Linear drive	Linear drive	Linear drive
Nominal Voltage	230V 50Hz	230V 50Hz	230V 50Hz
Consumption at rated pressure	1.8 A/250 W	1.6 A/280 W	2.4 A/400 W

GENERAL DATA					
Ambient temperature	-10 to 40 °C	-10 to 40 °C	-10 to 40 °C		
Weight	14.4 kg	16.0 kg	16.0 kg		
Outlet diameter	26 mm	26 mm	26 mm		
Average sound level	49 db (A)	50 db (A)	51 dB (A)		

SERVICE PARTS					
Chamber block set 1)	700500	700597	700597		
Air filter and gasket kit	700502	700598	700598		
Air filter kit	700510	700510	700510		
Protective switch ¹⁾	700512	700599	700599		


All listed values are measured at standard atmospheric conditions.

Please consult factory if 230V 60Hz is needed. Please refer to the operation manual for additional information.

Please refer to the operation manual for additional information.

1) Denotes that part is only available for trained service personnel.

FLOW CURVES



Note: Operation outside specified operating range is not recommended. All listed values are measured at standard atmospheric conditions

SERVICE PARTS

Chamber block set¹⁾ consists of:

- 4 x Pump head with valves
- 4 x Diaphragm assembly
- 4 x Diaphragm assem
- 4 x Diaphragm washer

Air filter and gasket kit consists of:

- 1 x Air cleaner element
- 1 x Air cleaner gasket
- 1 x Noise absorbing net
- 1 x Tank gasket
- 1 x Cover gasket
- 4 x L-Hose

Air filter kit consists of:

- 5 x Air cleaner element
- 5 x Air cleaner gasket

5250... Stock programme

Protective switch ¹⁾ consists of: 1 x Microswitch w/cover plate Please note: One unit is equipped with

two protective switches

Cable/Euro with plug Air connector consisting of LW-240 (700513)

SUPPLIED AS STANDARD

1 x Outlet hose, angled, 170/50 mm

- 2 x Hose clamp
- LW-300 & LW-400 (P/N 700600)
- 1 x Outlet hose, angled, 170/50 mm
- 4 x Hose clamp
- 1 x Relief valve assembly
- 1 x Hose connector

Accessory Available: Air connector, straight type (P/N 700514) consists of

1 x Outlet hose, straight, 150 mm

2 x Hose clamp